



Makrolon® Lumen XT-V sheet

Light diffusing

Makrolon® Lumen XT-V is a translucent polycarbonate sheet with a textured surface on one side specifically designed for lighting lenses where enhanced flame rating is required. Available in three diffusion levels, Lumen XT-V offers design flexibility and outstanding performance.

Intended Markets

- Industrial Luminaires
- Hazardous Location Lighting
- Transportation Lenses
- Fixtures with NEC Class I Circuits

Typical Properties*			
Property	Test Method	Units	Values
PHYSICAL			
Specific Gravity	ASTM D 792	-	1.2
Water Absorption, 24 hrs	ASTM D 570	%	0.15
Poisson's Ratio	ASTM E 132	-	0.38
Light Transmission			
LV3 @ 0.118"	ASTM D 1003	%	89
LV5 @ 0.118"	ASTM D 1003	%	76
LV7 @ 0.118"	ASTM D 1003	%	62
MECHANICAL			
Tensile Strength, Ultimate	ASTM D 638	psi	9,500
Tensile Strength, Yield	ASTM D 638	psi	8,900
Tensile Modulus	ASTM D 638	psi	340,000
Elongation	ASTM D 638	%	100
Flexural Strength	ASTM D 790	psi	14,000
Flexural Modulus	ASTM D 790	psi	370,000
Instrumented Impact @ 0.118"	ASTM D 3763	ft-lbs	48
THERMAL			
Coefficient of Thermal Expansion	ASTM D 696	in/in/°F	3.75 x 10 ⁻⁵
Coefficient of Thermal Conductivity	ASTM C 177	BTU-in/hr-ft ² -°F	1.35
Heat Deflection Temperature @ 264 psi	ASTM D 648	°F	222
Heat Deflection Temperature @ 66 psi	ASTM D 648	°F	244
ELECTRICAL			
Dielectric Constant @10 Hz	ASTM D 150	-	2.9
Dielectric Constant @ 60 Hz	ASTM D 150	-	2.8
Volume Resistivity	ASTM D 257	Ohm-cm	7.5 e 15
Dissipation Factor @ 60 Hz	ASTM D 150	-	0.002
Arc Resistance, Tungsten Electrodes	ASTM D 495	Seconds	125
Dielectric Strength, in air @ 0.118"	ASTM D 149	V/mil	390
FLAMMABILITY			
Flame Class @ 0.118"	UL 94	-	V0, 5VA


*Typical properties are not intended for specification purposes

Makrolon® Lumen XT-V sheet


Diffusion and Transmission

Lumen XT-V Grade	DIFFUSION (FWHM, degrees) 0.118" thickness	% TRANSMISSION (ASTM D 1003) 0.118" thickness
LV3	53	86
LV5	77	76
LV7	135	62

Correlated Color Temperature Shift for a 6000 K LED

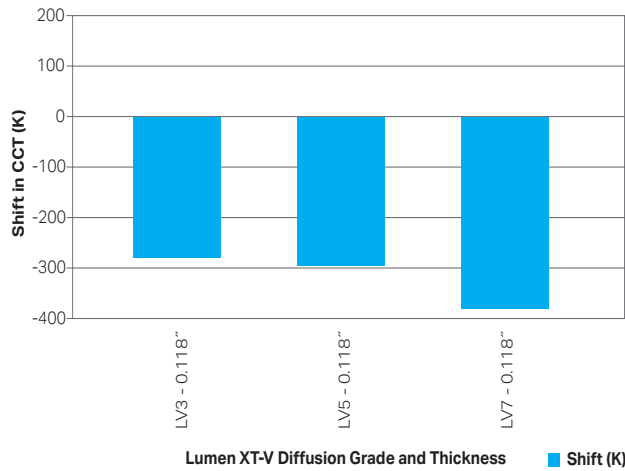

Correlated Color Temperature Shift for a 3000 K LED

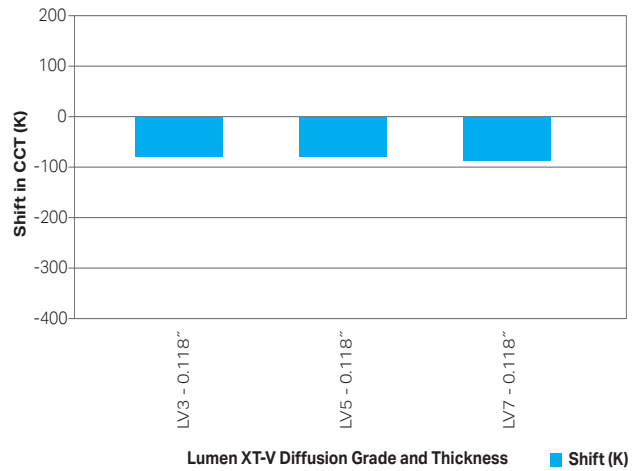

These graphs show measured shifts in Correlated Color Temperature (CCT) of light from an LED light fixture with a diffuser sheet vs. the same LED fixture without a diffuser. The LED fixtures' CCT without a diffuser is 3000 K and 6000 K.



1-888-CURBELL

www.curbellplastics.com

Curbell Plastics is a proud supplier of Covestro materials



119 Salisbury Road
 Sheffield, MA 01257
 Toll Free: 800.254.1707
 Fax: 800.457.3553
sfdinfo@covestro.com
sheets.covestro.com

The manner in which you use and the purpose to which you put and utilize our products, technical assistance and information (whether verbal, written or by way of production evaluations), including any suggested formulations and recommendations, are beyond our control. Therefore, it is imperative that you test our products, technical assistance, information and recommendations to determine to your own satisfaction whether our products, technical assistance and information are suitable for your intended uses and applications. This application-specific analysis must at least include testing to determine suitability from a technical as well as health, safety, and environmental standpoint. Such testing has not necessarily been done by Covestro.

Unless we otherwise agree in writing, all products are sold strictly pursuant to the terms of our standard conditions of sale which are available upon request. All information and technical assistance is given without warranty or guarantee and is subject to change without notice. It is expressly understood and agreed that you assume and hereby expressly release us from all liability, in tort, contract or otherwise, incurred in connection with the use of our products, technical assistance, and information. Any statement or recommendation not contained herein is unauthorized and shall not bind us. Nothing herein shall be construed as a recommendation to use any product in conflict with any claim of any patent relative to any material or its use. No license is implied or in fact granted under the claims of any patent.

With respect to health, safety and environment precautions, the relevant Safety Data Sheets (SDS) and product labels must be observed prior to working with our products.