

## TUFFAK DX-NR polycarbonate sheet

### POLYCARBONATE DIFFUSER SHEET FOR OUTDOOR LED LIGHTING

TUFFAK DX-NR is a translucent polycarbonate product specifically designed for use as a lighting lens in outdoor applications. The diffuser technology helps to provide uniform luminance and ensures elimination of LED hot spots while maintaining high light transmission. The advanced UV resistance technology provides long lasting weathering performance and the non-reflective texture built into the UV resistant side of the sheet, enhances its aesthetics.

When compared to other light diffusing products such as glass and acrylic, TUFFAK DX-NR has superior impact strength and toughness. Its higher flammability resistance and wider service temperature provide an additional advantage over acrylic diffusers.


### Typical Properties\*

Property	Test Method	Units	Values
<b>PHYSICAL</b>			
Specific Gravity	ASTM D 792	-	1.2
Water Absorption, 24 hrs	ASTM D 570	%	0.15
Poisson's Ratio	ASTM E 132	-	0.38
Light Transmission @ 0.060" / 0.118"	ASTM D 1003	%	69 / 61
Light Diffusion @ 0.060" / 0.118"	fwhm	degrees	150 / 152
<b>MECHANICAL</b>			
Tensile Strength, Ultimate	ASTM D 638	psi	9,500
Tensile Strength, Yield	ASTM D 638	psi	9,000
Tensile Modulus	ASTM D 638	psi	340,000
Elongation	ASTM D 638	%	110
Flexural Strength	ASTM D 790	psi	13,500
Flexural Modulus	ASTM D 790	psi	345,000
Instrumented Impact @ 0.118"	ASTM D 3763	ft-lbs	47
<b>THERMAL</b>			
Coefficient of Thermal Expansion	ASTM D 696	in/in/°F	3.75 x 10 <sup>-5</sup>
Coefficient of Thermal Conductivity	ASTM C 177	BTU-in/hr-ft <sup>2</sup> -°F	1.35
Heat Deflection Temperature @ 264 psi	ASTM D 648	°F	270
Heat Deflection Temperature @ 66 psi	ASTM D 648	°F	280
<b>ELECTRICAL</b>			
Dielectric Constant @10 Hz	ASTM D 150	-	3.0
Dielectric Constant @ 60 Hz	ASTM D 150	-	3.2
Volume Resistivity	ASTM D 257	Ohm-cm	>8 x 10 <sup>15</sup>
<b>FLAMMABILITY</b>			
Flame Class @ 0.060"	UL 94	-	V2**
@ 0.118"	UL 94	-	HB**
Horizontal Burn	ASTM D 635	in.	<1 (CC1)
Glow Wire Flammability Index	DIN EN 60695-2-12	°F	1560
Glow Wire Ignition Test	DIN EN 60695-2-13	°F	1607

\*Typical properties are not intended for specification purposes

\*\*Test results, product not UL 94 Listed

# TUFFAK DX-NR polycarbonate sheet

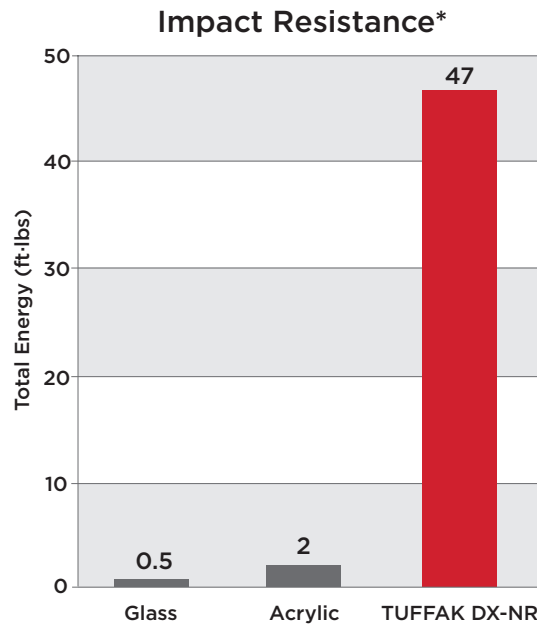

\*Instrumented Impact per ASTM D 3763, sample thickness 0.125" nominal

**CURBELL**  
PLASTICS

1-888-CURBELL

[www.curbellplastics.com](http://www.curbellplastics.com)

Curbell Plastics is a proud supplier of Plaskolite materials.

These suggestions and data are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use are beyond our control. We recommend that the prospective user determine the suitability of our materials and suggestions before adopting them on a commercial scale.

© 2018 **PLASKOLITE, LLC** 082018  
TUFFAK® is a registered trademark of Plaskolite LLC

**PLASKOLITE**

400 Nationwide Blvd, Suite 400  
Columbus, OH 43215  
800.254.1707 • Fax: 800.457.3553  
[plaskolite@plaskolite.com](mailto:plaskolite@plaskolite.com)  
[www.plaskolite.com](http://www.plaskolite.com)