

## HYGARD® CG375 POLYCARBONATE SHEET

### CONTAINMENT GRADE

Hygard CG375 containment grade sheet is a 9.52mm, 2-ply polycarbonate laminate that is tested to ASTM F 1915, ASTM F 1233 and H.P. White TP 0500. Unlike glass-clad products, this all-polycarbonate laminate resists spalling and white-out after repeated high force impacts, an advantage in maintaining visibility of a threat during an attack. All Hygard products incorporate TUFFAK polycarbonate sheet produced for high optical quality in security glazing laminates. Exterior surfaces have a proprietary TUFFAK AR hardcoat that facilitates cleaning and resists marring, chemical attack, and graffiti. Hygard CG375 sheet has a seven (7) year Limited Product Warranty against coating failure, delamination, yellowing, and hazing. The terms of the warranty are available upon request.

### APPLICATIONS

Jails, detention centers, psychiatric hospitals, reception areas, convenience stores, check cashing centers or facilities

### TYPICAL METRIC PROPERTIES\*

Property	Values
Gauge / Tolerance	9.5mm ± 5%
Weight	11.7 kg/ m <sup>2</sup>
Shading Coefficient	0.92
U-Value	0.84
Light Transmission	88%

\*Typical properties are not intended for specification purposes

### Product Performance Ratings

#### BALLISTIC

H.P. White TP 0500.03, Level A  
 ASTM F 1233, Class HG1 .38 Special LRN  
 FORCED ENTRY & CONTAINMENT  
 ASTM F 1233 Class 1.5 Contraband Passage  
 ASTM F 1233 Class 2.8 Body Passage  
 ASTM F 1915 Grade 3  
 H.P. White TP 0500 Level 1 Sequence 15  
 WMFL Level III

#### AGENCY INFORMATION


Combustibility Class CC1  
 Florida Building Code  
 2018 International Building Code (ICC ESR 2728)  
 Miami-Dade NOA: NOA

DIN EN ISO 23125 2015-04		
Machine Tools - Safety - Turning Machines		
		Class
HYGARD CG375	9.6 mm	C <sub>1</sub>
HYGARD CG500	13.2 mm	C <sub>3</sub>
HYGARD CG750	19.5 mm	C <sub>3</sub>

### Hygard CG375 Sheet Construction

4.75mm TUFFAK AR-1 sheet

Bonding Interlayer

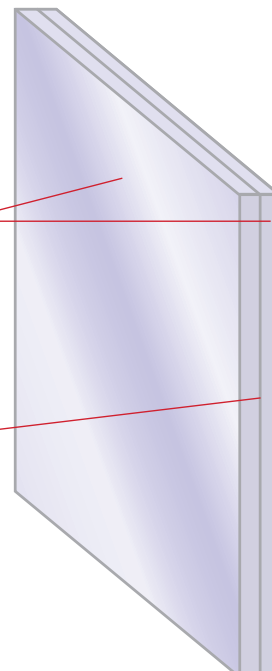

# HYGARD CG375 POLYCARBONATE SHEET

## Glazing recommendations

- » Structural security framing systems with equal or greater forced entry and/or ballistics ratings as the selected Hygard laminate are recommended
- » Hygard laminate should be cut to allow for a minimum of 2.54 cm edge engagement in the frame, with sufficient rabbet depth for material expansion (approx. 1.59mm/0.3m)
- » Use wet or dry sealants/gaskets that are compatible with polycarbonate
- » Remove protective masking after glazing operations are completed and before prolonged exposure to direct sunlight, moisture, or high temperature
- » See glazing details on [sheets.covestro.com](https://sheets.covestro.com)

## Product specification

Hygard CG375 polycarbonate laminate:

- » Two-ply, clear TUFFAK polycarbonate sheet constructed as follows:
  - 4.5mm TUFFAK AR-1 abrasion resistant surface
  - Polyurethane bonding interlayer
  - 4.5mm TUFFAK AR-1 abrasion resistant surface

## Compatible cleaners

The following cleaning agents are compatible with TUFFAK polycarbonate sheet products when used according to the manufacturer's recommendations:

- » Dawn
- » Joy®
- » Palmolive Liquid®
- » Windex® Ammonia free

Dawn and Joy are registered trademarks of Proctor & Gamble, Palmolive is a registered trademark of Colgate Palmolive, Windex is a registered trademark of Drackett Products

## General cleaning instructions:

- » Thoroughly pre-rinse with warm water to loosen and wash away surface residue, grit and grime.
- » Using a soft microfiber cloth or moist non-abrasive sponge, gently wash with a mild diluted soap or detergent.
- » Rinse thoroughly with lukewarm, clean water. To prevent water spots, thoroughly dry the glazing with a dry soft cloth.

## TECH TIP:

The edges of coated polycarbonate sheet are not protected with an abrasion and chemical resistant hard coating. Do not allow cleaning solutions and solvents to pool along the edges for any length of time. Always rinse edges thoroughly with generous amounts of lukewarm clean water.

**CURBELL**  
PLASTICS

1-888-CURBELL

[www.curbellplastics.com](http://www.curbellplastics.com)

Curbell Plastics is a proud supplier of Plaskolite materials.

These suggestions and data are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use are beyond our control. We recommend that the prospective user determines the suitability of our materials and suggestions before adopting them on a commercial scale.

© 2022 PLASKOLITE, LLC 112022

TUFFAK® and Hygard® are registered trademarks of Plaskolite LLC

**PLASKOLITE**

400 Nationwide Blvd, Suite 400  
Columbus, OH 43215  
800.848.9124 • Fax: 877.538.0754  
[plaskolite@plaskolite.com](mailto:plaskolite@plaskolite.com)  
[www.plaskolite.com](http://www.plaskolite.com)

PDS315\_CG375\_M