
Quick Reference Guide to Polycarbonate Film

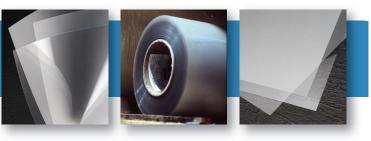

PRODUCT OVERVIEW

Core Products: Covestro Makrofol® Polycarbonate Film Standard Thicknesses: .005", .007", .010", .015", .020", .030" Standard Roll Widths: 48.5", 36.5" Operations: Sheeting, guillotining, slit rolls, die cut pieces, laminating Stock Sheets: Stock sheet size is 24.5" x 48.5"

Typical Applications: Nameplates, graphic overlays, membrane switches, backlit signage

Questions about which other films are available?

Contact Curbell Plastics for availability and pricing.

TYPICAL PROPERTIES

FILMS		
COVESTRO MAKROFOL®	SABIC LEXAN®	DESCRIPTION
DE 7-2	8B35, 8B35F	Velvet/very fine matte texture, reduced pinholing
DE 1-1	8010	Gloss/gloss texture
PCVE	8A35	Velvet/gloss texture
DE 1-4	8A13F	Gloss/fine matte texture, anti-glare
FR 7-2	FR65	Velvet/very fine matte, UL 94, V-0 rated
UV1 7-2	HP12W	Weatherable outdoor film, chemical resistant
DE 1-4 020209	8A23	White translucent backlit film
CR 6-2		Blended PC/PBT film, chemical resistant, easy to form
DE 1-M		Gloss/micro-matte, low stress
DE 6-2	8B38	Fine velvet/very fine matte texture
SR 906	6060	PMMA capped polycarbonate film

Proud supplier of Covestro Makrofol® Polycarbonate Film



CURBELL

www.curbellplastics.com 1.888.CURBELL (287-2355)

©2016 Curbell Plastics, Inc. Unauthorized use is strictly prohibited. All other trademarks, service marks and logos used herein are property of their respective owners. All rights hereto are retained by Curbell Plastics and any third party owners of such rights. All statements, technical information and recommendations contained in this publication are for informational purposes only. Curbell Plastics, Inc. does not guarantee the accuracy or completeness of any information contained herein and it is the customer's responsibility to conduct its own review and make its own determination regarding the suitability of specific products for any given application. MAP1023D 0216