



Spectar™ Sheet PETG




Product Description

Spectar PETG sheet is a rigid co-polyester material designed for the visual merchandising, retail display and graphic arts markets. It can be used whenever printability, toughness, and ease of fabrication and chemical resistance are required. Its diverse properties make Spectar* the ideal choice for a variety of specialty applications.



Value Solution

Spectar PETG offers good impact strength, excellent thermoforming and fabrication characteristics, and excellent resistance to chemicals. The material is tougher than acrylic and impact-modified acrylic, providing fabricators with durable, long-lasting parts. Its outstanding thermoforming characteristics and ability to cold-bend without showing any stress whitening make Spectar the ideal choice for retail display cases, among other applications. Spectar PETG also offers excellent printability, especially for translucent or clear print jobs.

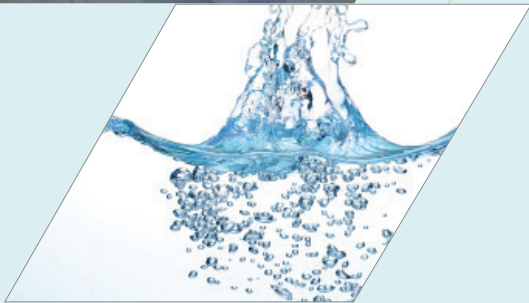

Markets and End-Use Applications

- Graphic arts - for all primary printing processes; works well for clear/translucent print projects
- Retail marketing - for point-of-purchase (POP) displays, indoor signage, store fixtures and other kiosks
- Architectural design - for display units, architectural fixtures and accessories, and light fixtures

*Spectar is a registered trademark of Eastman Chemical Company

www.polyone.com

PolyOne Americas

33587 Walker Road
Avon Lake, Ohio 44012
United States
+1 440 930 1000



Curbell Plastics is a proud supplier of PolyOne Corporation materials.

PolyOne Designed Structures and Solutions

120 South Central Avenue, Suite 1700
Clayton, Missouri 63105
+1 888 721 4242

Copyright © 2013, PolyOne Corporation. PolyOne makes no representations, guarantees, or warranties of any kind with respect to the information contained in this document about its accuracy, suitability for particular applications, or the results obtained or obtainable using the information. Some of the information arises from laboratory work with small-scale equipment which may not provide a reliable indication of performance or properties obtained or obtainable on larger-scale equipment. Values reported as "typical" or stated without a range do not state minimum or maximum properties; consult your sales representative for property ranges and min/max specifications. Processing conditions can cause material properties to shift from the values stated in the information. PolyOne makes no warranties or guarantees respecting suitability of either PolyOne's products or the information for your process or end-use application. You have the responsibility to conduct full-scale end-product performance testing to determine suitability in your application, and you assume all risk and liability arising from your use of the information and/or use or handling of any product. POLYONE MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, either with respect to the information or products reflected by the information. This literature shall NOT operate as permission, recommendation, or inducement to practice any patented invention without permission of the patent owner.

*Spectar is a trademark of Eastman Chemical Company.