

DuPont™ Vespel® CR-6110

Chemically-Resistant Shapes for Electronic Applications

Technical Datasheet

DuPont™ Vespel® CR-6110 shapes are the latest carbon-fiber filled thermoplastic fluoropolymer that have demonstrated outstanding performance in aggressive wet chemical / plasma conditions and elevated temperatures. Customers report improved preventative maintenance cycles by switching to Vespel® CR-6110 in wafer cleaning and resist stripping operations. It has also demonstrated good ultraviolet (UV) resistance in Flat Panel Display applications. In dry plasma applications, Vespel® CR-6110 has been used as a thermal insulator and bearing.

Vespel® CR-6110 is available upon request in wide variety of shapes (plaque, sheet, rod, ring, tube) and can also be machined for custom parts in various applications.


The data presented below are based on limited production runs and are subject to revision as new data becomes available.

Mechanical Property	Temperature	Test Method	Direction	Unit	Typical Values
Tensile Strength	23 °C (73 °F)	ASTM D-638/test specimen modified	x-y z	MPa (ksi)	126 (18) 15 (2)
Tensile Elongation	23 °C (73 °F)	ASTM D-638/test specimen modified	x-y z	%	1.4 0.7
Tensile Modulus	23 °C (73 °F)	ASTM D-638/test specimen modified	x-y z	MPa (ksi)	7,180 (1,050) 2,287 (332)
Compressive Strength	23 °C (73 °F)	ASTM D-695	x-y z	MPa (ksi)	103 (15) 189 (36)
Compressive Modulus	23 °C (73 °F)	ASTM D-695	x-y z	MPa (ksi)	10,045 (1,457) 2,810 (407)
Compressive Strength	260 °C (500 °F)	ASTM D-695	x-y z	MPa (ksi)	25 (3.6) 131 (19)
Compressive Modulus	260 °C (500 °F)	ASTM D-695	x-y z	MPa (ksi)	1,785 (259) 1,137 (165)
Flexural Strength	23 °C (73 °F)	ASTM D-790	x-y	MPa (ksi)	180 (26)
Flexural Modulus	23 °C (73 °F)	ASTM D-790	x-y	MPa (ksi)	12,100 (1,754)



The miracles of science™

Thermal Property	Conditions	Test Method	Direction	Unit	Typical Values
Heat Distortion Temperature	1.82 MPa	ASTM D-648	x-y	°C (°F)	319 (606)
Coefficient of Thermal Expansion (CLTE)	23-260 °C (73-500 °F) 35 – 149 °C (95-300 °F) 149 -204 °C (300-399 °F) 204 -260 °C (399-500 °F)	ASTM E-831	x-y z z z	10 ⁻⁶ ppm/°C (10 ⁻⁶ in/in-°F)	5.6 (3) 290 (160) 450 (249) 720 (400)
Other Property	Conditions	Test Method	Direction	Unit	Typical Values
Electrical Property Surface Resistivity	23 °C (73 °F)	JIS K7194	x-y z	Ohm/square	10 ⁻¹ 10 ⁻¹
Volume Resistivity	23 °C (73 °F)	JIS K7194	x-y z	Ohm-cm	10 ⁻² 10 ⁻¹
Hardness	Test force: 1kgf	Micro Vickers ASTM E-384	x-y z	none	11 14
Specific Gravity	23 °C (73 °F)	ASTM D-792	—	—	2.06

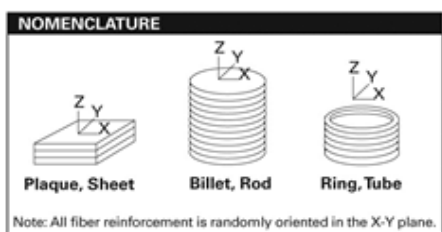

Visit us at kalrez.dupont.com or vespel.dupont.com

Contact DuPont at the following regional locations:

North America
800-222-8377

Latin America
+0800 17 17 15

Europe, Middle East, Africa
+41 22 717 51 11

Greater China
+86-400-8851-888

ASEAN
+65-6586-3688

Japan
+81-3-5521-8484

The information provided in this data sheet corresponds to our knowledge on the subject at the date of its publication. This information may be subject to revision as new knowledge and experience becomes available. The data provided fall within the normal range of product properties and relate only to the specific material designated; these data may not be valid for such material used in combination with any other materials, additives or pigments or in any process, unless expressly indicated otherwise.

The data provided should not be used to establish specification limits or used alone as the basis of design; they are not intended to substitute for any testing you may need to conduct to determine for yourself the suitability of a specific material for your particular purposes. Since DuPont cannot anticipate all variations in actual end-use and disposal conditions, DuPont does not guarantee favorable results, makes no warranties and assumes no liability in connection with any use of this information. All such information is given and accepted at the buyer's risk. It is intended for use by persons having technical skill, at their own discretion and risk. Nothing in this publication is to be considered as a license to operate under or a recommendation to infringe any patent. DuPont advises you to seek independent counsel for a freedom to practice opinion on the intended application or end-use of our products.

CAUTION: Do not use DuPont materials in medical applications involving implantation in the human body or contact with internal body fluids or tissues unless the material has been provided from DuPont under a written contract that is consistent with DuPont policy regarding medical applications and expressly acknowledges the contemplated use. For further information, please contact your DuPont representative. You may also request a copy of DuPont POLICY Regarding Medical Applications H-50103-5 and DuPont CAUTION Regarding Medical Applications H-50102-5

Copyright © DuPont. The DuPont Oval Logo, DuPont™, The miracles of science™, Kalrez®, and Vespel® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

(06/10) Reference No. VPE-A10844-00-C0815



The miracles of science™

CURBELL
PLASTICS

1-888-CURBELL
www.curbellplastics.com

Curbell Plastics is an Authorized Distributor of
DuPont™ Vespel® Parts and Shapes.