

DuPont™ Vespel® Parts for Hydrogen Energy





Contents

Introduction & Challenges of H₂ energy 3

DuPont™ Vespel® Polyimide Parts 6

Key properties of Vespel® for Hydrogen Sealing & Storage 7

Key properties of Vespel® for Operational Efficiency 8

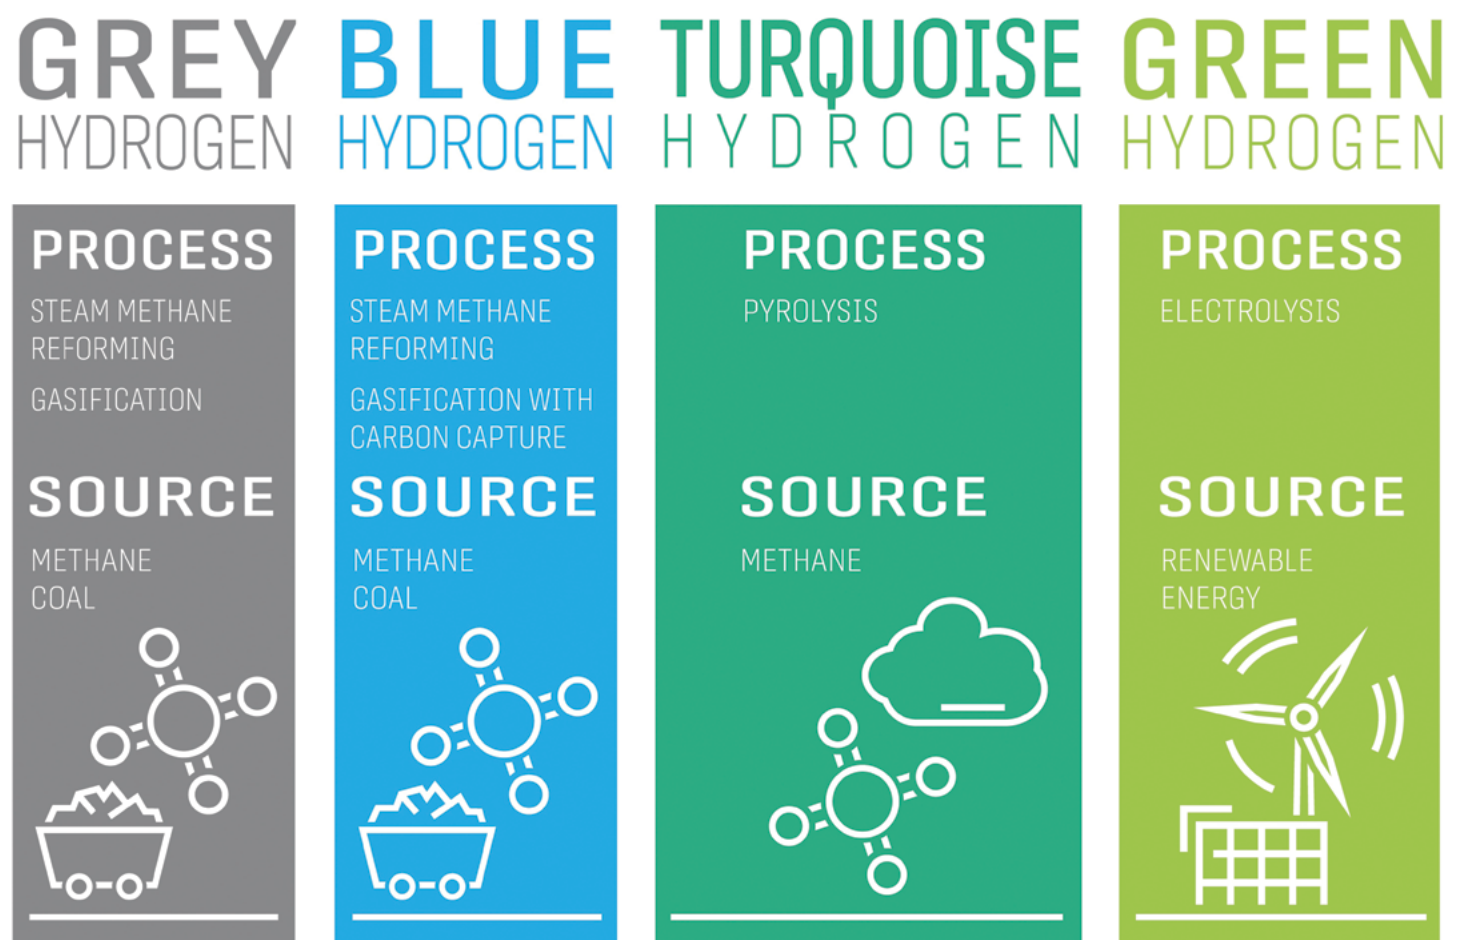
Conclusion & Applications 9

Introduction

Given the current environmental challenges linked to greenhouse gas emissions, hydrogen has the potential to become an important source of clean energy. Hydrogen has the benefit of only generating water as a byproduct when combusted for energy and can be used in applications such as electric fuel cell vehicles or as a source for heating.

However, large-scale, economical production of hydrogen itself without the generation of greenhouse gasses is still a challenge. The most common method of producing hydrogen, often referred to as grey hydrogen, involves decarbonating methane using steam methane reforming. This process releases CO₂ as a byproduct. To make this process cleaner, technology is being developed to capture the CO₂ generated. With this added step, this type of production is often referred to as blue hydrogen. Alternative processes that eliminate the creation of CO₂ during hydrogen production are also being developed. These processes are referred to as green hydrogen, and generally refer to the production of hydrogen through the electrolysis of water via a renewable energy source. The byproduct of this process is simply oxygen, thus eliminating emissions of any greenhouse gasses.

Types of Hydrogen Production



Challenges of using hydrogen as new energy source

Widespread adoption of hydrogen as an alternative energy source brings about a set of requirements different from those of fossil fuels. Designing safe, efficient, and environmentally-friendly processes for the production, conversion, transportation and supply of hydrogen is critical.

Storage and Transportation

Hydrogen's volumetric energy density is extremely low compared to other fuels. Therefore, to be a practical fuel source its energy density must be increased. This is commonly achieved by either compressing hydrogen gas to pressures between 350-700 bar, or by liquifying hydrogen by cooling it to -253 °C at atmospheric pressure. In both of these states hydrogen's volume is reduced to a more reasonable size for storage and transport. However, maintaining hydrogen as a liquid or compressed gas can be difficult. Tanks with proper thermal insulation or active cooling systems are necessary to keep hydrogen in its liquid state for extended

periods of time. Furthermore, systems must balance both efficiency and cost effectiveness, a particularly complicated challenge due to the significant temperature variation produced by rapid pressure change during hydrogen transfer and dispensing.

Safety

Hydrogen is highly reactive and can ignite in air at concentrations as low as 4%. Due to this, safety is a concern if uncontrolled hydrogen leakage occurs. Because of its low molecular weight, pressurized hydrogen molecules can permeate certain materials, including metals, leading to cracks. This phenomena, called hydrogen embrittlement, can significantly reduce the ductility of solid metals and is common when metals are in contact with hydrogen at variable high pressures.



DuPont™ Vespel® Polyimide Parts

DuPont™ Vespel® is the brand name for a range of high performance, mainly polyimide-based plastics. Vespel® SP polyimide was originally developed in cooperation with NASA for the Apollo Space Project.

Over the past 50 years, the Vespel® parts and shapes portfolio has expanded to include a variety of different grades, each with unique performance characteristics accomplished by varying the types and levels of fillers and different manufacturing methods for parts or shapes. Vespel® parts and shapes are resistant to heat, creep, wear and a variety of chemicals, making them ideal solutions for the applications of compressing, transporting, and storing hydrogen.



Key properties of DuPont™ Vespel® for Hydrogen Sealing and Storage

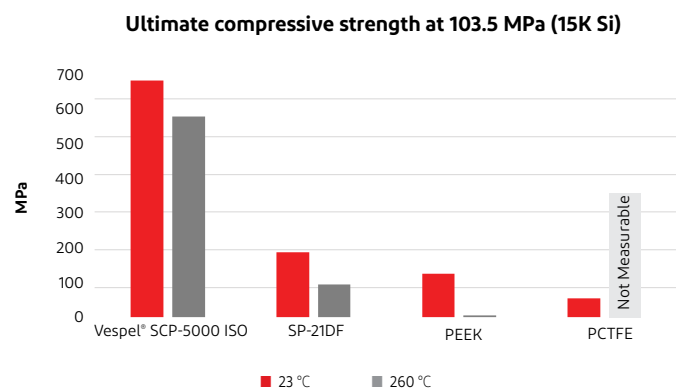
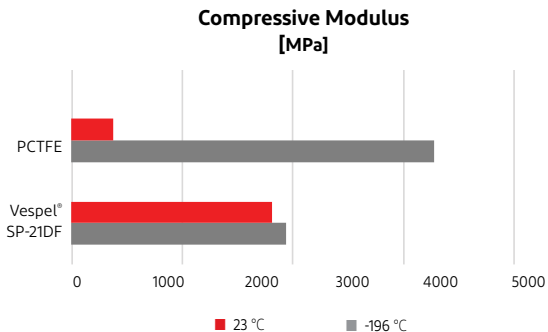
Low and consistent modulus and higher mechanical resistance

The “soft but strong” behavior of Vespel® is a key advantage in cryogenic and hydrogen valve applications, where it is necessary to maintain sealing performance at low temperatures.

To obtain an excellent seal for hydrogen applications, the seal must perform well in both cryogenic and high temperatures and withstand sudden changes in temperature and pressure while maintaining its mechanical properties.

The elastic modulus of Vespel® is very stable at temperatures ranging from ambient to cryogenic, unlike other polymers such as PEEK and PCTFE, which lose elasticity at lower temperatures.


Additionally, Vespel® parts provide better ultimate compression resistance which surpass both PEEK and PCTFE, with only a slight drop at higher temperatures.



Low hydrogen permeability

Hydrogen permeability is a key material property to establish if a polymer can properly store hydrogen over a long period of time. The lower the permeability, the better the material's ability to contain hydrogen and avoid leaking.

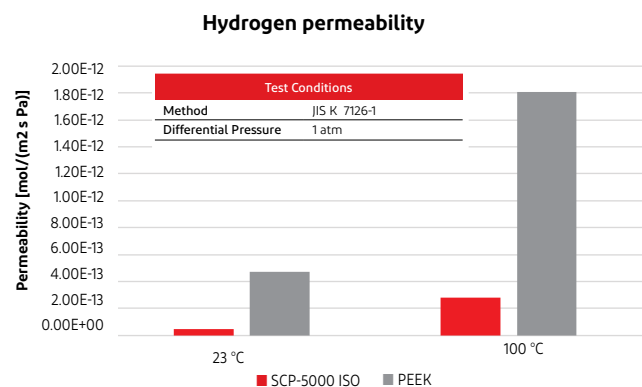When compared to PEEK in similar conditions, Vespel® Polyimide Parts show significantly lower hydrogen permeability, which even remains reasonably low when tested at higher temperatures.




Hydrogen permeation tests were performed via gas chromatography using a differential pressure method.

Key properties of Vespel® for Operational Efficiency

Creep

Hydrogen leaks largely originate from deformed seals or gaskets. Therefore, materials used in sealing elements should display excellent creep performance.

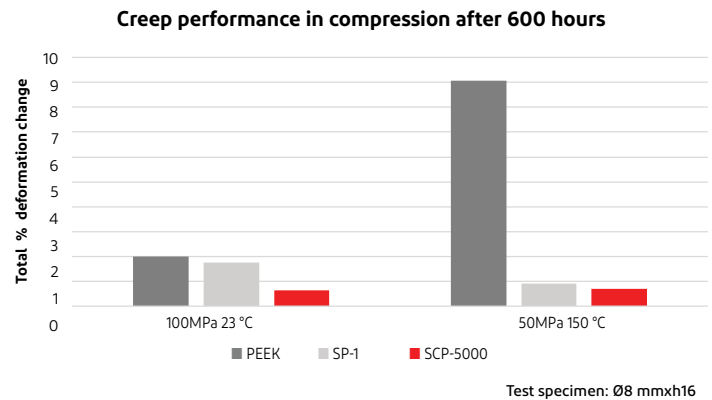Vespel® exhibits high dimensional stability, maintaining its sealing performance over a long service lifetime.



Wear and Friction

Valves require low friction to actuate properly. This is even more important in cryogenic environments of many hydrogen applications. Due to its low coefficient of friction, Vespel® can help reduce actuation force, helping to reduce energy consumption.

In addition, the low wear rate of Vespel® in hydrogen is an important property which helps ensure the long service life of the valve, contributing to less frequent maintenance.

The same characteristics are also beneficial for pumps and compressors in terms of operational efficiency improvement and potential reduction of energy consumption.

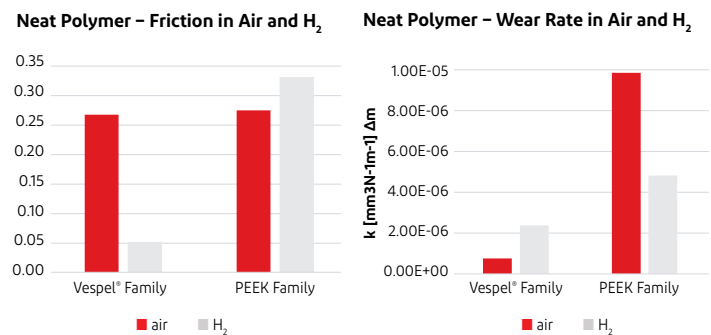


Fig 1.: COF and Wear and friction for Neat polymers of the Vespel® and PEEK Family, data generated by the BAM Bundesanstalt für Materialforschung und -prüfung by Mrs. Theiler, Counterface AISI 304, Ra ~ 0.2 µm, sliding speed v = 0.2 m/s, contact pressure 3 MPa.

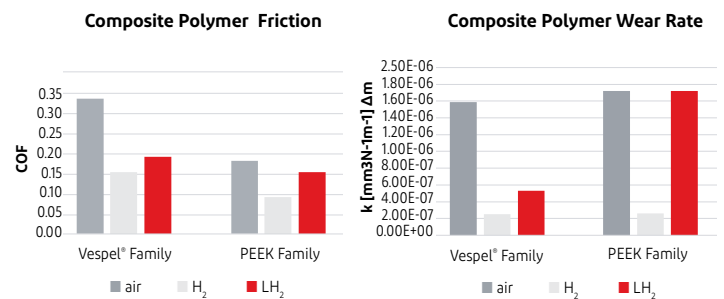







Fig 2: COF and Wear and friction for composite polymers of the Vespel® and PEEK Family, data generated by the BAM Bundesanstalt für Materialforschung und -prüfung by Mrs. Theiler, Counterface AISI 304, Ra ~ 0.2 µm, sliding speed v = 0.2 m/s, contact pressure 3 MPa.

Summary

Vespel® is the answer to the most stringent sealing requirements in hydrogen applications, thanks to its unique blend of thermal, mechanical, and tribological properties.

Challenges in hydrogen applications

Vespel® solutions

| | |
|---|--|
|  Bubble tight sealing from elevated down to cryogenic temperatures | → A low and consistent compressive modulus , and high mechanical resistance, offering exceptional sealing in a variety of typical H ₂ conditions |
|  Potential permeability issues during storage, due to low molecular weight of hydrogen | → Significantly lower H₂ permeability than materials like PEEK across a wide range of temperatures |
|  Service life under high loads in wide temperature ranges, from elevated down to cryogenic | → Excellent creep performance at high loads and elevated temperatures, “ soft but strong ” characteristics for sealing at low temperatures |
|  Demanding tribological requirements, efficiency and service life | → Low COF in air and hydrogen , helping to reduce actuation force and improve operational efficiency /reduce energy consumption |
|  Costly maintenance | → Low wear rate that contributes to lowering the frequency at which components need replacement |

Vespel®: the ideal blend of properties to generate value in hydrogen applications

| Key Vespel® Applications | | |
|---|-------------------------------|--|
| Valves and Pressure Reducers | Pumps | Compressors |
| Vespel® S | Vespel® S and CR | Vespel® CR |
| Seats | Bearings | Piston Rings |
| Stem Packing | Wear Rings | Rider Bands |
| Seat Carrier Seals | Piston Ring | Labyrinth Seals |
| Hydrogen Receptacles | Bushings | Packing Rings |
| Connectors | | Valve Plates |
| Industrial and transportation applications, from production to mobility | Pipelines, storage, refueling | Production, storage, pipeline, refueling |



Hydrogen

H₂

zero emission

Visit us at vespel.com

CURBELL
PLASTICS

1-888-CURBELL
www.curbellplastics.com

Curbell Plastics is an Authorized Distributor of
DuPont™ Vespel® Parts and Shapes.

The information set forth herein is furnished free of charge, is based on technical data that DuPont believes to be reliable and represents typical values that fall within the normal range of properties. This information relates only to the specific material designated and may not be valid for such material used in combination with other materials or in other processes. It is intended for use by persons having technical skill, at their own discretion and risk. This information should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their conditions of use present no health or safety hazards and comply with applicable law. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.

CAUTION: Do not use DuPont materials in medical applications involving implantation in the human body or contact with internal body fluids or tissues unless the material has been provided from DuPont under a written contract that is consistent with the DuPont policy regarding medical applications and expressly acknowledges the contemplated use. For further information, please contact your DuPont representative.

DuPont's sole warranty is that our products will meet our standard sales specifications in effect at the time of shipment. Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, DUPONT SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR NON INFRINGEMENT. DUPONT DISCLAIMS LIABILITY FOR ANY SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, ® or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted. © 2023 DuPont. All rights reserved.

Form No. VPE-A40084-00-B0423 CDP



dupont.com